



1101 McKinley Street
Anoka, MN 55303
Phone (763) 786-6682
Fax (763) 786-2167
www.polycam.com



Part Name: Bauer Quick Disconnect

Part Number: 630-xxxx

Quick Disconnect Transitions

The Poly-Cam quick disconnect transition is a multi-level mechanical transition fitting. The polyethylene or pipe-quality copolymer material are hydraulically compressed into the Bauer transition fittings.

The transition spool has a male and female Bauer transition compressed onto opposite ends of the HDPE pipe. The spool is available in lengths of 5 ft., 10 ft., 20 ft., and 40 ft.

Design

Relaxation of the pipe creates a seal to prevent leakage. Under pressure, the internal pressure within the pipe increases the sealing surface area on the barb. Under zero internal pressure, the compression and tensional strain created by the compression of the multi-level barbs are greater than the stress created by relaxation and/or thermal expansion and contraction. As the internal pressure increases, the connection between the pipe material and transition fitting increases.

- Sizes range from 3" to 12".
- 3"-8" uses Type B Bauer
- 10-12" uses Type A Bauer
- Note: 3" fittings use 90mm Bauer coupling

System Performance

The transition fitting is designed to handle the pressure rating of the HDPE pipe with a 2:1 safety factor at 73.40 degrees Fahrenheit with a minimum 50-year design life.

Quality Assurance

The transition fitting shall be manufactured by Poly-Cam, Inc. Poly-Cam, Inc. shall provide quality assurance with regards to proper installation, compatibility, performance, and acceptance. The transition joint meets or exceeds the requirements of:

- ASTM 1598 and ASTM 1599
- All Fittings meet ARRA requirements.

Installation

Bauer Fitting: Insert the male Bauer coupling into the female Bauer coupling. The gasket inside of the female Bauer coupling will create a seal with the male Bauer end. The lever ring snaps the fitting together providing a quick and durable connection.

Material

Galvanized Steel Fitting:

- The Poly-Cam coupling is manufactured of Carbon Steel (A53 or A106 grade), hot-dipped galvanized (in accordance to ASTM A123) and welded to the Type B Bauer fittings.

High-Density Polyethylene: HDPE pipe

- Meets ASTM D-3350 with minimum cell classification values of 345464C (PE 3408), PE445574C (PE 4710)
- Meets ASTM F714.
- Density shall be no less than 0.955 g/cm as referenced in ASTM D1505
- Melt index no greater than 0.15 g/10 minutes when tested per ASTM D 1238
- Tensile Strength at Yield -tensile shall be 3,200 psi to less than 3,500 psi as referenced in ASTM D638
- ESCR-Environmental Stress Crack Resistance shall be over 5,000 hours with zero failures when tested per ASTM D 1693-Condition C
- All pipe meets ASTM 3035.
- All certifications will be submitted upon request.


Warranty

The warranty period is one year after the date of substantial completion of installation.

Series 630 Bauer Quick Disconnect

Nominal Size (In.)	Pressed SDR11 PE Pipe I.D. A	Male Coupling O.D. B	Female Coupling O.D. C	Male Coupling Length D	Female Coupling Length E
3	~2.45	4.71	5.4	7.55	5.75
4	~3.23	5.7	6.56	8.15	6.25
6	~4.92	7.06	8.38	10	8.05
8	~6.16	9.04	10.53	11.15	9.25
10	~7.69	11.85	13.35	14.75	12.25
12	~9.74	14.38	16.5	17	14

3"-8" Bauer Type B with Lever Ring and Female O-Ring

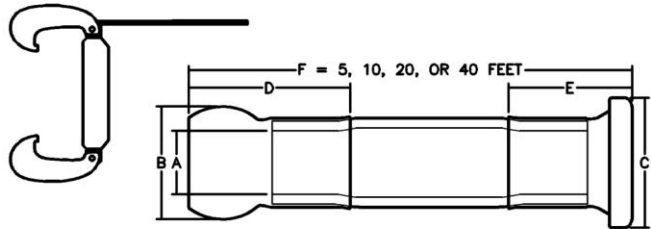

10"-12" Bauer Type A with Attached Lever and Locking Ring

