



Series 708

Transition with Female CTS

Available In:

Carbon Steel Epoxy-Coated

304 Stainless Steel

316 Stainless Steel

Aluminum Bronze


Standard SDR Sizes 7, 9, 11, 17

Import or Domestic

Fully Pressure Rated



Nominal Size (In.)	Coupling O.D. A	Pressed SDR9 PE Pipe I.D. B	Exposed SDR9 PE Pipe I.D. C	Exposed PE Pipe O.D. D	Coupling Length E	Exposed PE Pipe Length F	Overall Length G	Thread Length H
0.5	0.990	~0.42	0.487	0.625	1.6	7	8.6	0.61
0.75	1.245	~0.60	0.681	0.875	1.6	7.2	8.8	0.8
1	1.500	~0.83	0.875	1.125	2	6.661	8.661	0.91
1.25	2.050	~0.99	1.069	1.375	2.6	6.45	9.05	0.95
1.5	2.350	~1.15	1.263	1.625	3	6.33	9.33	0.9
2	2.750	~1.56	1.653	2.125	4	5.4	9.4	1

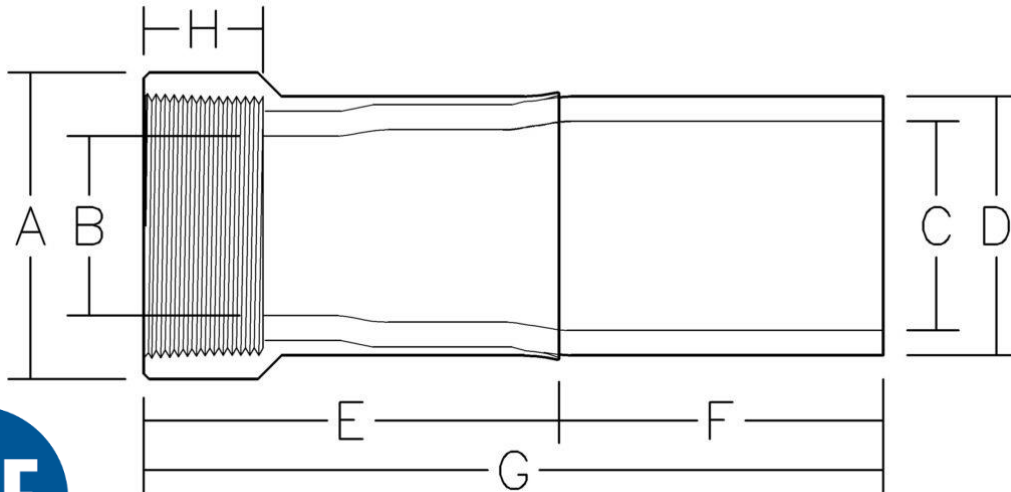

Certified to NSF/ANSI/CAN 61

1101 McKinley Street – Anoka, MN 55303 (763) 786-6682
 Fax: (763) 786-2167 www.poly-cam.com

Revision Date: 2-18-2023