




1101 McKinley Street  
Anoka, MN 55303  
Phone (763) 786-6682  
Fax (763) 786-2167  
www.polycam.com

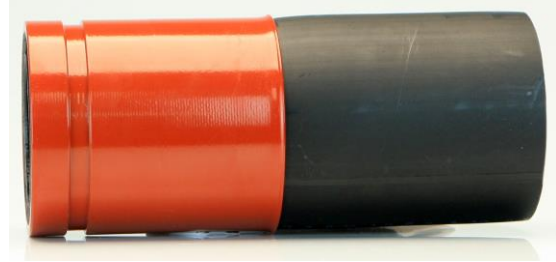

Part Name: Groove Transition Fitting  
Part Number: 701-xxxx

### Groove Transitions

The Poly-Cam Groove Transition is a multi-level mechanical transition fitting. The polyethylene or pipe-quality copolymer material are hydraulically compressed into the transition fitting.

### Design

Relaxation of the pipe creates a seal to prevent leakage. Under pressure, the internal pressure within the pipe increases the sealing surface area on the barb. Under zero internal pressure, the compression and tensional strain created by the compression of the multi-level barbs are greater than the stress created by relaxation and/or thermal expansion and contraction. As the internal pressure increases, the connection between the pipe material and transition fitting increases.

- Sizes range from 1" to 24" Iron Pipe Sizes.
- Grooves are cut to standard cut groove specification.

### System Performance

The transition fitting is designed to handle the pressure rating of the HDPE pipe with a 2:1 safety factor at 73.40 degrees Fahrenheit with a minimum 50-year design life.

### Quality Assurance

The transition fitting shall be manufactured by Poly-Cam, Inc. Poly-Cam, Inc. shall provide quality assurance with regards to proper installation, compatibility, performance, and acceptance. The transition joint meets or exceeds the requirements of:

- ASTM 1598 and ASTM 1599
- All Fittings meet ARRA requirements.

**Note: This fitting does not meet ASTM D2513. The fitting CANNOT be used in natural gas applications.**

## Installation

**HDPE pipe end:** Install transition fitting to comply with the pipe manufacturer's recommended procedures. All field welds shall be completed per Plastic Pipe Institute's welding procedure for butt fusion.

**Steel Fitting:** The entrance of the coupling is tapered at the beginning. The polyethylene or copolymer material is cold pressed into the coupling. This allows the material to relax into the multi-level barb system.

## Material

### **Steel Fitting:**

- Manufactured of Carbon Steel (A53 or A106 grade), Type 304, or Type 316 (ASTM A249 or ASTM A269) and or ERW pipe (ASTM SA-312)
- For carbon steel, the **epoxy coating** (IF 194T Red Iron Oxide) is fusion bonded to the metal. Meets NSF 61, FDA 175.300, AWWA C116-01,C213-01, UL 262 and FM 1120/1130

### **High-Density Polyethylene:** HDPE pipe

- Meets ASTM D-3350 with minimum cell classification values of 345464C (PE 3408), PE445574C (PE 4710)
- Meets ASTM F714.
- Density shall be no less than 0.955 g/cm as referenced in ASTM D1505
- Melt index no greater than 0.15 g/10 minutes when tested per ASTM D 1238
- Tensile Strength at Yield -tensile shall be 3,200 psi to less than 3,500 psi as referenced in ASTM D638
- ESCR-Environmental Stress Crack Resistance shall be over 5,000 hours with zero failures when tested per ASTM D 1693-Condition C
- All pipe meets ASTM 3035.
- All certifications will be submitted upon request.

## Warranty

The warranty period is one year after the date of substantial completion of installation.

# Series 701 Transition with Cut Groove

## SDR<sub>11</sub>

Nominal Size (In.)	Coupling O.D. <b>A</b>	Pressed SDR <sub>11</sub> PE Pipe I.D. <b>B</b>	Exposed SDR <sub>11</sub> PE Pipe I.D. <b>C</b>	Exposed PE Pipe O.D. <b>D</b>	Coupling Length <b>E</b>	Exposed PE Pipe Length <b>F</b>	Total Length <b>G</b>
1	1.315	~0.84	1.06	1.315	2.25	5.75	8
1.25	1.66	~1.06	1.34	1.66	2.6	5.4	8
1.5	1.9	~1.28	1.533	1.9	2.6	5.4	8
2	2.375	~1.64	1.917	2.375	3	5	8
3	3.5	~2.42	2.826	3.5	4	4	8
4	4.5	~3.23	3.633	4.5	4	8	12
5	5.563	~4.0	4.49	5.563	5	8	13
6	6.625	~4.8	5.349	6.625	5	8	13
8	8.625	~6.3	6.963	8.625	6	9	15
10	10.75	~7.9	8.679	10.75	7	9	16
12	12.75	~9.5	10.293	12.75	9	9	18
14	14	~10.4	11.301	14	9	11	20
16	16	~11.9	12.915	16	10	12	22
18	18	~13.5	14.532	18	14	16	30
20	20	~15.1	16.146	20	16	20	36
24	24	~18.4	19.374	24	18	22	40

