



1101 McKinley Street
Anoka, MN 55303
Phone (763) 786-6682
Fax (763) 786-2167
www.polycam.com



Part Name: Weld-on Transition Fitting
Part Number: 815-xxxx

Weld-on Transitions for DIPS HDPE

The Poly-Cam weld-on transition is a multi-level mechanical transition fitting. The polyethylene or pipe-quality copolymer material are hydraulically compressed into the transition fitting.

Design

Relaxation of the pipe creates a seal to prevent leakage. Under pressure, the internal pressure within the pipe increases the sealing surface area on the barb. Under zero internal pressure, the compression and tensional strain created by the compression of the multi-level barbs are greater than the stress created by relaxation and/or thermal expansion and contraction. As the internal pressure increases, the connection between the pipe material and transition fitting increases.

- Sizes range from 4" to 42" Ductile Iron Pipe Size (DIPS)
- Rated for both water and gas use

System Performance

The transition fitting is designed to handle the pressure rating of the HDPE pipe with a 2:1 safety factor at 73.40 degrees Fahrenheit with a minimum 50-year design life.

Quality Assurance

The transition fitting shall be manufactured by Poly-Cam, Inc. Poly-Cam, Inc. shall provide quality assurance with regards to proper installation, compatibility, performance, and acceptance. The transition joint meets or exceeds the requirements of:

- ASTM D2513 Category 1.
- Meets NSF 61, listing PM20928
- ASTM D3261
- ASTM F2897: Tracking and Traceability Encoding System

Installation

HDPE pipe end: Install transition fitting to comply with the pipe manufacturer's recommended procedures. All field welds shall be completed per Plastic Pipe Institute's welding procedure for butt fusion.

Steel Fitting: The entrance of the coupling is tapered at the beginning. The polyethylene or copolymer material is cold pressed into the coupling. This allows the material to relax into the multi-level barb system.

Material

Steel Fitting:

- Manufactured of Carbon Steel (A53 or A106 grade), Type 304, or Type 316 (ASTM A249 or ASTM A269) and or ERW pipe (ASTM SA-312)
- For carbon steel, the **epoxy coating** (IF 194T Red Iron Oxide) is fusion bonded to the metal. Meets NSF 61, FDA 175.300, AWWA C116-01,C213-01, UL 262 and FM 1120/1130
- Inserts are manufactured out 304 stainless steel tubing (ASTM A249 or ASTM A269) and/or ERW pipe (ASTM SA-312).

High-Density Polyethylene: HDPE pipe

- Meets ASTM D-3350 with minimum cell classification values of 345464C (PE 3408), PE445574C (PE 4710)
- Meets ASTM F714.
- Density shall be no less than 0.955 g/cm as referenced in ASTM D1505
- Melt index no greater than 0.15 g/10 minutes when tested per ASTM D 1238
- Tensile Strength at Yield -tensile shall be 3,200 psi to less than 3,500 psi as referenced in ASTM D638
- ESCR-Environmental Stress Crack Resistance shall be over 5,000 hours with zero failures when tested per ASTM D 1693-Condition C
- All pipe meets ASTM 3035.
- All certifications will be submitted upon request.

Warranty


The warranty period is one year after the date of substantial completion of installation.



Series 815 Weld-on Transition for Gas and Water DIPS HDPE

DIPS SDR 17

Nominal Size (In.)	Steel Pipe O.D. A	Pressed SDR17 PE Pipe I.D. B	Exposed SDR17 PE Pipe I.D. C	Exposed PE Pipe O.D. D	Coupling Length E	Exposed PE Pipe Length F	Overall Length G
4	4.5	~3.350	4.202	4.8	13	8.5	21.5
6	6.625	~5.000	6.039	6.9	17	11	28
8	8.625	~6.900	7.922	9.05	20	12	32
10	10.75	~8.600	9.716	11.1	26	16	42
12	12.75	~10.150	11.555	13.2	28	20.5	48.5
14	14	~11.740	13.392	15.3	28	20	48
16	16	~13.680	15.229	17.4	28	22	50
18	18	~15.460	17.068	19.5	28	21.75	49.75
20	20	~17.300	18.905	21.6	28	25.75	53.75
24	24	~19.620	22.582	25.8	28	29.75	54.75
30	30	~26.210	28.010	32	33	24	57
36	36	~31.200	33.524	38.3	33	24.75	57.75
42	42	~35.750	38.950	44.5	42	40	82

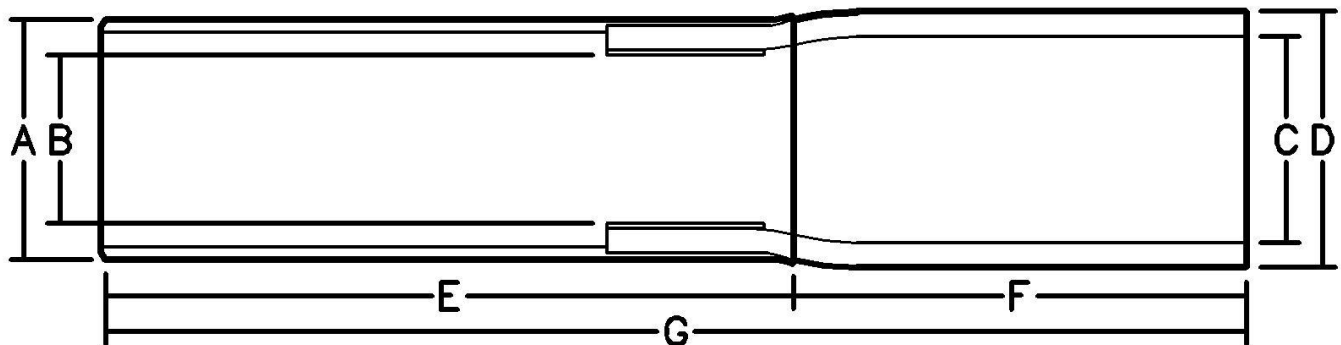

Certified to
NSF/ANSI/CAN 61