



# Series 712

## Transition with Female NPT

**Available In:**

- Aluminum Bronze**
- Carbon Steel Epoxy-Coated**
- 304 Stainless Steel**
- 316 Stainless Steel**


**Standard SDR Sizes 7, 9, 11, 17**

**Import or Domestic**

**Fully Pressure Rated**



Nominal Size (In.)	Coupling O.D. A	Pressed SDR11 PE Pipe I.D. B	Exposed SDR11 PE Pipe I.D. C	Exposed PE Pipe O.D. D	Coupling Length E	Exposed PE Pipe Length F	Overall Length G	Thread Length H
0.5	0.990	~0.625	0.68	0.840	1.6	7	8.6	0.61
0.75	1.245	~0.79	0.85	1.050	1.6	7.2	8.8	0.8
1	1.500	~0.97	1.06	1.315	2	6.661	8.661	0.91
1.25	1.900	~1.24	1.34	1.660	2.6	6.45	9.05	0.95
1.5	2.350	~1.42	1.533	1.900	3	6.33	9.33	0.9
2	2.540	~1.76	1.917	2.375	4	5.4	9.4	1
2.5	3.040	~1.99	2.31	2.875	4	5.75	9.75	1.5
3	4.144	~2.42	2.826	3.500	5.6	4	9.6	1.6
4	5.160	~3.23	3.633	4.500	5.875	8	13.875	1.875
5	6.260	~4.0	4.49	5.563	6.75	8	14.75	1.75
6	7.390	~4.9	5.349	6.625	6.875	8	14.875	1.875
8	9.650	~6.3	6.963	8.625	9.5	8	17.5	2.5

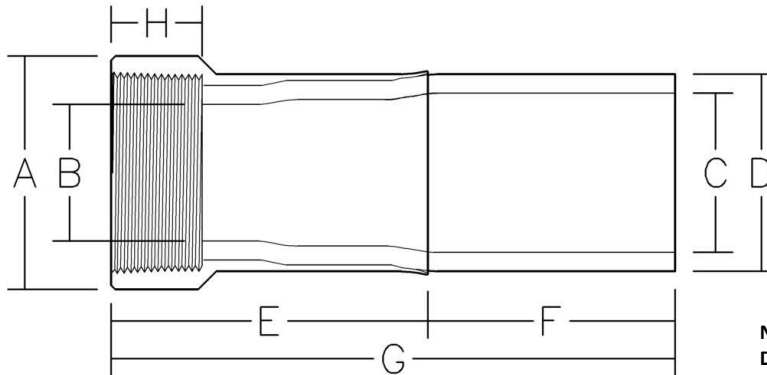

Certified to NSF/ANSI/CAN 61

1101 McKinley Street – Anoka, MN 55303 (763) 786-6682  
 Fax: (763) 786-2167 www.poly-cam.com

**Note: This fitting does not meet ASTM D2513. The fitting CANNOT be used in natural gas applications.**

Revision Date: 9-14-2024