

Transition with Cut Groove

Available In:

Carbon Steel Epoxy-Coated

304 Stainless Steel

316 Stainless Steel


Standard SDR Sizes 7, 9, 11, 17

Import or Domestic

Fully Pressure Rated



Nominal Size (In.)	Coupling O.D. A	Pressed SDR7 PE Pipe I.D. B	Exposed SDR7 PE Pipe I.D. C	Exposed PE Pipe O.D. D	Coupling Length E	Exposed PE Pipe Length F	Total Length G
1	1.315	~0.72	0.92	1.315	2.25	5.75	8
1.25	1.66	~0.90	1.158	1.66	2.6	5.4	8
1.5	1.9	~1.10	1.325	1.9	2.6	5.4	8
2	2.375	~1.41	1.656	2.375	3	5	8
3	3.5	~2.08	2.44	3.5	4	4	8
4	4.5	~2.79	3.137	4.5	4	8	12
5	5.563	~3.4	3.88	5.563	5	8	13
6	6.625	~4.1	4.619	6.625	5	8	13
8	8.625	~5.5	6.013	8.625	6	9	15
10	10.75	~6.9	7.494	10.75	7	9	16
12	12.75	~8.2	8.889	12.75	9	9	18
14	14	~9.1	9.76	14	9	11	20
16	16	~10.4	11.154	16	10	12	22
18	18	~11.8	12.549	18	14	16	30
20	20	~13.2	13.943	20	16	20	36
24	24	~16.0	16.731	24	18	22	40

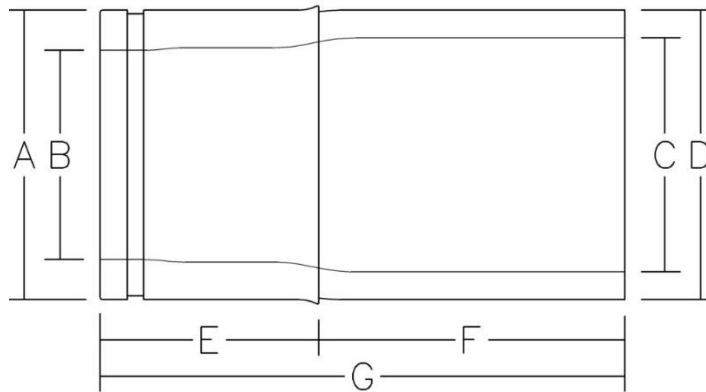

Note: This fitting does not meet ASTM D2513. The fitting CANNOT be used in natural gas applications.